
CONTECH

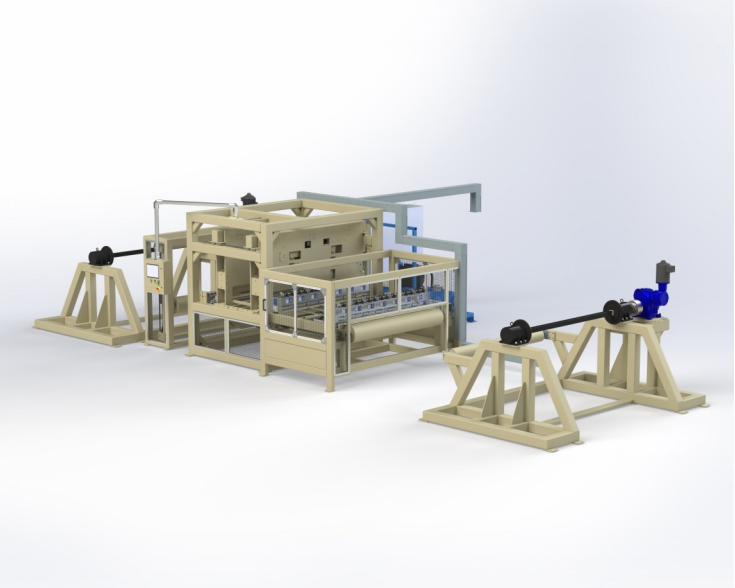

WE BELIEVE IN **PRECISION**. WE BELIEVE IN **RELIABILITY**. WE BELIEVE IN **RESULTS**.

DUAL HITCH FEED PUNCH PRESS

Specifications:

- 5 hp VFD Drive with dual reduction 300-1 gearbox
- 84” wide 15,000 lb belt capacity
- Capable of running a 84" wide belt.
- Belt slug brush to remove slugs while running.
- Hydraulic Belt Guide: Automatic tightening of guide for belting.
- Input nip set Servo driven (slave from master increment)
- Fixed punch station
- Adjustable punch station
- Master exit nip set Servo driven
- Hydraulic powered punch modules
- Accuracy of increment +/- 1/16".
- 50-80 Boschert safety chucks
- Tension nip roller set with adjustable nip height
- 200 fph based on 8” increment longer increment increases speed

Options:

- 20,000 lb option with 80-120 Boschert chucks and hyd. Closers
- Additional punching stations to increase speed
- Full customization available

CONTACT US

1756 S. 151st Street West | Goddard, KS 67052 | P 1-800-633-7621 | F (316) 722-2976 | info@contechusa.com