CONTECH

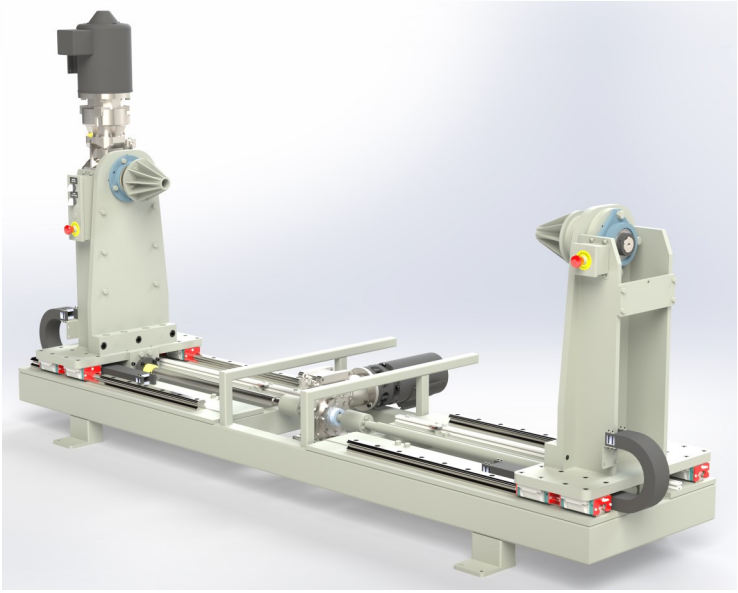

WE BELIEVE IN **PRECISION**. WE BELIEVE IN **RELIABILITY**. WE BELIEVE IN **RESULTS**.

SHAFTLESS POWERED UNWIND

Specifications:

- Shaftless unwind 75” web Max. 36” min. web 42” Dia.
- 1000 lbs.
- Tapered custom chuck adaptors to accept 3” to 6” I.D. Cores
- VFD driven
- Roll dia. sensors for feedback of speed
- Local unwind controls as well as HMI controls from main HMI
- Utilities, Performance, & Misc.
- 208 Volts, 60 Hz, 3 ph. (power from existing machine) Air - 90 psi clean dry air.
- 300 ft. roll @ 1ea. Per minute

Options:

- Web width
- Capacity
- Drive
- Power
- Speed
- Full customization available

CONTACT US

1756 S. 151st Street West | Goddard, KS 67052 | P 1-800-633-7621 | F (316) 722-2976 | info@contechusa.com